

Why Choose SuperVision **AHD **SSV Series?****

- ✓ **SSV = Sony SuperVision**
- ✓ **Full HD 1080p Display Real Time 30fps per Channel**
- ✓ **Full HD 1080p Recording DVR Real Time 30fps per Channel**
- ✓ **1/3" SONY IMX-322 inside the SSV cameras guarantee**
Superb Vision
- ✓ **Made In Taiwan (Not China Mainland) with 1year**
Guarantee
- ✓ **High Quality, Super Bright and Long-Life EXIR Infra-Red array**
LED illuminator (Life time more than 10,000hours or 3-years
with average 9hours/day)
- ✓ **Long distance Full HD transmission over coaxial cable (more**
than 500mtr using RG-6), without any delay.

SSV-163HD

DOME AHD 1080p EXIR 2MegaPixel CAMERA

1/3" SONY image sensor, 2MP




Specifications

Design	3-axis (Wall-mount, Ceiling-mount)
Pick-up Device	1/3" SONY IMX-322 sensor, 2MP
Active Picture Elements	1920(H) x 1080(V)
Day/Night	True Day/Night with ICR and IR cut filter
Video Output	Analog High Definition
Minimum Illumination	0.01 Lux F 2.0 (0 Lux IR ON)
Electronic Shutter	1/50 to 1/100,000 sec
S/N Ratio	More than 50dB
Infra Red	4pcs EXIR array LED (18mtr)
Max. Distance	500mtr using RG-6 coaxial cable
Lens	Built-in Lens 4mm
Base Color	White
Operation Temperature	-10°C ~ +50°C
Power Supply	DC 12Volt
Current	90mA (IR OFF) / 150mA (IR ON)
Dimensions	90mm (base) x 70mm
Weight	200grams

SSV-108HD

OUTDOOR AHD 1080p EXIR 2MegaPixel CAMERA

1/3" SONY image sensor, 2MP

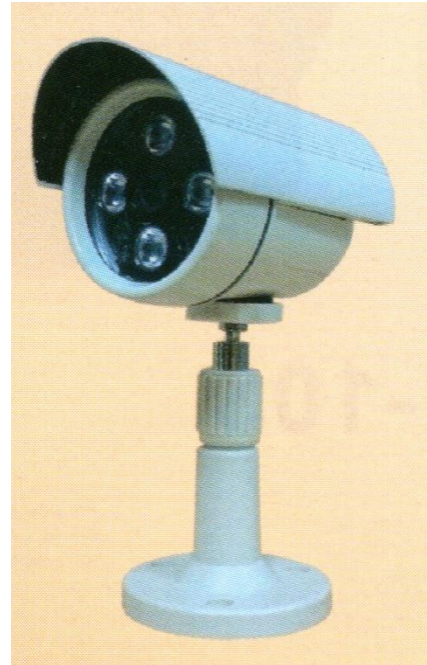

Specifications

Design	Outdoor Bullet Camera
Pick-up Device	1/3" SONY IMX-322 sensor, 2MP
Active Picture Elements	1920(H) x 1080(V)
Day/Night	True Day/Night with ICR and IR cut filter
Video Output	Analog High Definition
Minimum Illumination	0.01 Lux F 2.0 (0 Lux IR ON)
Electronic Shutter	1/50 to 1/100,000 sec
S/N Ratio	More than 50dB
Infra Red	4pcs EXIR array LED (18mtr)
Max. Distance	500mtr using RG-6 coaxial cable
Lens	Built-in Lens 4mm
Base Color	Beige
Operation Temperature	-10°C ~ +50°C
Power Supply	DC 12Volt
Current	90mA (IR OFF) / 150mA (IR ON)
Dimensions	75mm (dia) x 110mm (L)
Weight	400grams

SSV-9304HD

Full HD Digital Video Recorder

4 Channel Tribrid (AHD+Analog/IPC),
Real Time 1080P (Display/Record)
CLOUD Server



Specifications

Display Resolution	Up to 2MP (1920 x 1080pixel) , real time per channel
Compression	H.264 Main Profile (Video) / ADPCM (Audio)
Video Input	4 Channel (BNC)
Audio Input	4 Channel (RCA)
Video Output	1 x Full HD VGA (1920*1080p); 1 x HDMI (1920*1080p)
Display Frame Rate	Real-Time 120fps @2MP (1920x1080p)
Record Frame Rate	Real-Time 120fps @2MP (1920x1080p)
Operating Mode	4x AHD+ Analog 1080p / 9x IPC (ONVIF) 3MP
Record Mode	Manual / Alarm / Motion Detect / Timing (Schedule)
Playing Mode	1-4Ch Simultaneously, 1080p Quality.
Searching Mode	By Time/Log/Event/Channel
HDD	2x SATA HDD up to 8TB totally
Digital Zoom	Digital Zoom Function in Live Mode and Playback Mode
Network & Mobile Streaming	100/100MBps multiple browser (IE, Chrome, Firefox, Safari) & Mobile App with Remote Playback (Smart Meye) include Software Centralized Management System with Password Protection and User Management Permissions
Remote Control	Yes
USB Mouse Control	Yes ; include 1 x Mouse
Media Back Up	1 x USB 2.0 Device or Network
PTZ Control	RS-485 , support Multiple Protocols
Operation Temperature	-10°C ~ +55°C
Power Supply	DC 12Volt / 4A
Weight	1.6Kgs (without HDD)
Dimensions	335 x 250 x 50mm

SSV-9308HD

Full HD Digital Video Recorder

8 Channel Tribrid (AHD+ Analog/IPC),
Real Time 1080P (Display/Record)
CLOUD Server



Specifications

Display Resolution	Up to 2MP (1920 x 1080pixel) , real time per channel
Compression	H.264 Main Profile (Video) / ADPCM (Audio)
Video Input	8 Channel (BNC)
Audio Input	4 Channel (RCA)
Video Output	1 x Full HD VGA (1920*1080p); 1 x HDMI (1920*1080p)
Display Frame Rate	Real-Time 240fps @2MP (1920x1080p)
Record Frame Rate	Real-Time 240fps @2MP (1920x1080p)
Operating Mode	8x AHD+ Analog 1080p / 16x IPC (ONVIF) 1080Pp
Record Mode	Manual / Alarm / Motion Detect / Timing (Schedule)
Playing Mode	1-8Ch Simultaneously, 1080p Quality.
Searching Mode	By Time/Log/Event/Channel
HDD	2x SATA HDD up to 8TB totally
Digital Zoom	Digital Zoom Function in Live Mode and Playback Mode
Network & Mobile Streaming	100/100MBps multiple browser (IE, Chrome, Firefox, Safari) & Mobile App with Remote Playback (Smart Meye) include Software Centralized Management System with Password Protection and User Management Permissions
Remote Control	Yes
USB Mouse Control	Yes ; include 1 x Mouse
Media Back Up	1 x USB 2.0 Device or Network
PTZ Control	RS-485 , support Multiple Protocols
Operation Temperature	-10°C ~ +55°C
Power Supply	DC 12Volt / 4A
Weight	1.8Kgs (without HDD)
Dimensions	335 x 250 x 50mm

SSV-9316HD

Full HD Digital Video Recorder

16 Channel Tribrid (AHD+Analog/IPC),
Real Time 1080P (Display/Record)
CLOUD Server



Specifications

Display Resolution	Up to 2MP (1920 x 1080pixel) , real time per channel
Compression	H.264 Main Profile (Video) / ADPCM (Audio)
Video Input	16 Channel (BNC)
Audio Input	16 Channel (RCA)
Video Output	1 x Full HD VGA (1920*1080p); 1 x HDMI (1920*1080p)
Display Frame Rate	Real-Time 480fps @2MP (1920x1080p)
Record Frame Rate	Real-Time 480fps @2MP (1920x1080p)
Operating Mode	16x AHD+Analog 1080p / 16x IPC (ONVIF) 1080p
Record Mode	Manual / Alarm / Motion Detect / Timing (Schedule)
Playing Mode	1-16Ch Simultaneously, 1080p Quality.
Searching Mode	By Time/Log/Event/Channel
HDD	4x SATA HDD up to 16TB totally
Digital Zoom	Digital Zoom Function in Live Mode and Playback Mode
Network & Mobile Streaming	100/100MBps multiple browser (IE, Chrome, Firefox, Safari) & Mobile App with Remote Playback (Smart Meye) include Software Centralized Management System with Password Protection and User Management Permissions
Remote Control	Yes
USB Mouse Control	Yes ; include 1 x Mouse
Media Back Up	1 x USB 2.0 Device or Network
PTZ Control	RS-485 , support Multiple Protocols
Operation Temperature	-10°C ~ +55°C
Power Supply	DC 12Volt / 6A
Weight	5.1 Kgs (without HDD)
Dimensions	430 x 368 x 68mm